

PRESENTED BY



**AN ISO 17025
ACCREDITED COMPANY**

DALLAS FT WORTH AUSTIN HOUSTON

NICOLSCALES.COM

800.225.8181

[CONTACT US](#)

NICOL SCALES & MEASUREMENT IS AN ISO ACCREDITED CALIBRATION
COMPANY THAT HAS PROVIDED CALIBRATION, REPAIR AND SALES OF ALL TYPES
OF WEIGHING AND MEASUREMENT PRODUCTS SINCE 1931.

LR150KPlus 150 kN Universal Materials Testing Machine

The LR150KPlus advanced materials testing machine incorporates an extensive range of features making it ideal for performing complex as well as routine testing applications up to 150 kN (33722 lbf). The LR150KPlus is a floor standing machine featuring a twin column design with a maximum crosshead travel of 1150 mm (45.3 in). Extended machine column options (LR150KPlus-E models) for testing higher elongation materials are also available.

The machine is microprocessor controlled and incorporates world proven 32 bit technology for highly accurate load measurement and rapid data acquisition. The LR150KPlus features an integral user interface consisting of a side mounted control console with large, positive action membrane keys, allowing complex tests to be performed at the touch of a button. A back lit 4 line LCD display shows the test and set up information in a wide choice of user selectable languages and units.

The stand alone system is capable of storing up to 600 test results from a choice of ten programmable test set ups. Test parameters are entered using the keypad in a sequential menu driven format.

For additional flexibility, the LR150KPlus can also be connected to a personal computer with optional Lloyd Instruments NEXYGENPlus material test and control software. NEXYGEN software provides almost unlimited testing and results processing capability in a familiar Windows® environment.

The high stiffness frame incorporates a crosshead guidance system to prevent side loading of the sample under test. Stiffness compensation on the LR150KPlus machine allows compensation to be made for any deformation, however small, of the load frame, load cell and grips of the instrument itself during compression testing. The crosshead is driven by twin lead screws and a high precision servo motor and DC servo system to achieve a wide range of speeds.

A series of highly accurate, interchangeable load cells are also available for tension, compression and cycling through zero force measurements. Our extensive range of grips and fixtures support virtually any type of test. The system is ideal for use in production, quality control, education and research environments.

Features

- Simple to set up, operate and maintain
- High accuracy load measurement
- Constant load holding
- Data sampling rate 8 kHz
- Load rate control
- Saves up to 600 test results
- 10 programmable test set ups
- Pre-loading of samples and cycling to load or extension limits
- Multi-stage testing with NEXYGENPlus software
- Extension resolution <0.04 microns
- Multi-lingual display options
- Multi-unit display options
- Flash upgradeable
- Extended column options for testing higher extension materials
- Wide selection of load cells, grips, jigs, extensometers, temperature chambers and other accessories

Specifications


Force Capacity:	
LR150KPlus (Standard)	150 kN (33722 lbf)
LR150KPlus-E (Extended)	150 kN (33722 lbf)
Crosshead Speed Range:	0.001 to 254 mm/min (0.00004 to 10 in/min)
Speed Accuracy:	<0.2% at steady state
Maximum Crosshead Travel:	
LR150KPlus	1150 mm (45.3 in)
LR150KPlus -E	1620 mm (63.8 in)
Width Between Columns:	620 mm (24.4 in)
Minimum Load Resolution:	0.0001 N (Load cell specific)
Load Cell Accuracy:	<0.5%
Extension Resolution:	<0.04 microns
Data Sampling Rate:	8 kHz
Display:	40 character x 4 line backlit LCD
Extensometer Inputs:	Digital and Analogue
Load Measuring System:	EN ISO 7500:2004 Class 0.5 ASTM E4
Software:	NEXYGENPlus Data Analysis Software (optional)
Supply Voltage:	230Vac ±10%, 50-60 Hz, Fuse T5AH250V, 115Vac ±10%, 50-60 Hz, Fuse T10AH250V
Weight:	
LR150KPlus	900 kg (1984 lb)
LR150KPlus-E	910 kg (2006 lb)
Operating Temperature:	5° to 35° C (41° to 95° F)



Accessories

Item	Part No	Item
HLC Series Load Cells:		Grips & Fixtures:
50 N (11.25 lbf)	01/2936	A wide range of grips and fixtures are available. For further information see our grip specification sheets.
100 N (22.5 lbf)	01/2413	
500 N (112.5 lbf)	01/3213	Extensometers:
1000 N (225 lbf)	01/2412	We supply contacting and non-contacting extensometers. For further information see our extensometer specification sheets.
2500 N (562.5 lbf)	01/3214	
5000 N (1124 lbf)	01/2944	
10 kN (2248 lbf)	01/2411	
20 kN (4496 lbf)	01/3215	
30 kN (6744 lbf)	01/2978	
50 kN (11241 lbf)	01/3101	Temperature Chambers and High Temperature Furnaces:
150 kN (33722 lbf)	01/2458	A range of thermal chambers and furnaces are available. For further information see our specification sheets.
Application Software:		Splinter Shields:
NEXYGEN <i>Plus</i>	40/0771	Splinter shields can be supplied to your specific requirements. Contact Lloyd Instruments for further information.

Machine Dimensions

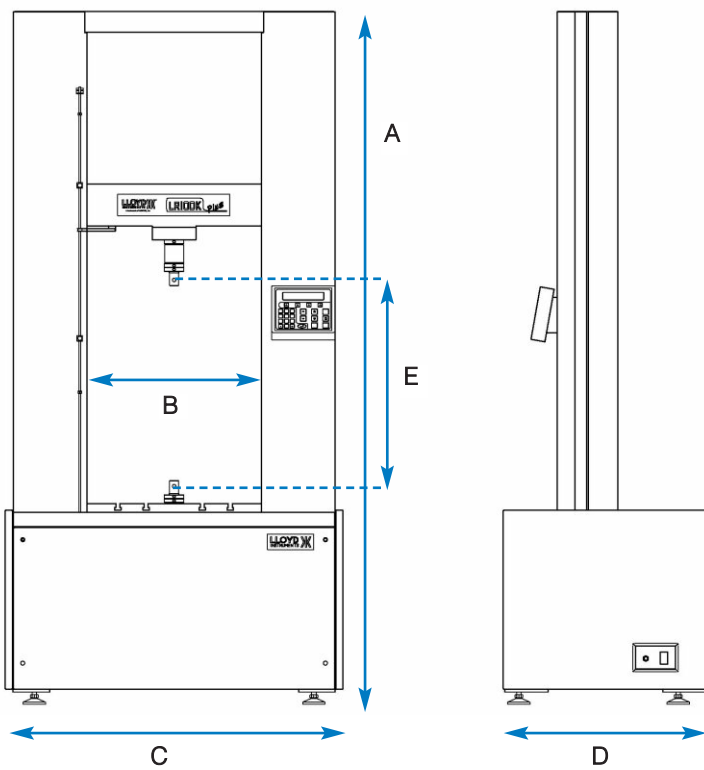

	mm	in
A (Standard machine height)	2471	97.3
A (Extended machine height)	2970	116.9
B	620	24.4
C	1509	59.4
D	733	29.9
E (Standard machine travel)	1150	45.3
E (Extended machine travel)	1620	63.8



Tensile test



Compression test



Flexure test



Machine Control Console

Ordering Information

Model	Part No	Capacity	Description
LR150K <i>Plus</i>	01/3334	150 kN (33722 lbf)	LR150K <i>Plus</i> Materials Testing Machine with Console
LR150K <i>Plus</i> -E	01/3391	150 kN (33722 lbf)	LR150K <i>Plus</i> Materials Testing Machine (Extended) with Console

AMETEK®
MEASUREMENT & CALIBRATION
TECHNOLOGIES

www.ametek.com

UK / Head Office

Lloyd Instruments Ltd
Steyning Way
Bognor Regis
West Sussex, PO22 9ST

Tel +44 (0)1243 833 370
Fax +44 (0)1243 833 401
E-mail uk-far.general@ametek.co.uk
Web www.lloyd-instruments.co.uk

France

AMETEK S.A.S.
Rond Point de l'Épine des Champs
Buro Plus - Bât. D
78990 Elancourt

Tel +33 (0)1 30 68 89 40
Fax +33 (0)1 30 68 89 49
E-mail general@lloyd-instruments@ametek.fr
Web www.lloyd-instruments.fr

Germany

AMETEK GmbH
Rudolf-Diesel-Straße 16
D-40670 Meerbusch

Tel +49 (0)2159 9136-0
Fax +49 (0)2159 9136-39
E-mail info@ametek.de
Web www.ametek.de

USA

AMETEK Measurement & Calibration
Technologies Division
8600 Somerset Drive
Largo, Florida 33773

Tel +1 (727) 536 7831
Fax +1 (727) 539 6882
E-mail chatillon.fl-lar@ametek.com
Web www.chatillon.com

Singapore

AMETEK Singapore Pte Ltd
No. 43 Changi South Avenue 2
#04-01 Singapore
#05-12 Techpoint 486164, Singapore

Tel +65 6484 2388
Fax +65 6481 6588
E-mail aspl@ametek.com.sg
Web www.lloyd-instruments.com

China

AMETEK, Inc. - Shanghai Rep. Office
Rm 912, Metro Tower
30 Tian Yao Qiao Road
Shanghai 200030

Tel +86 21 6426 8111
Fax +86 21 6426 7818 Ext.12
E-mail lloyd@ametek.com.cn
Web www.lloyd-instruments.com

